


Vodafone Mobile WI-FI R216-Z


Modify Admin Password

Establish a connection to the internet by connecting the pocket Wi-Fi to your laptop/ computer through Wi-Fi connection or cable connection.


Open a web browser and enter the URL on the address bar: **http://VodafoneMobile.wifi** or **http://192.168.0.1**

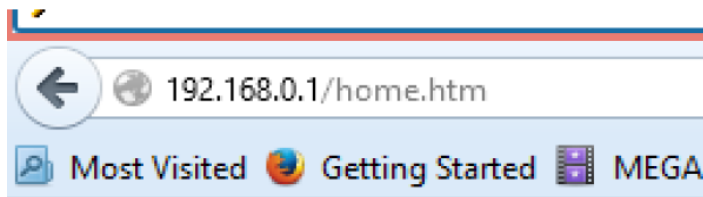

Login using default admin **password** as '**admin**'.

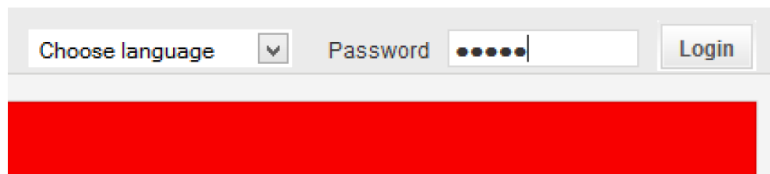

Select '**Router**' on the Navigation bar and then select '**Router Settings**'.

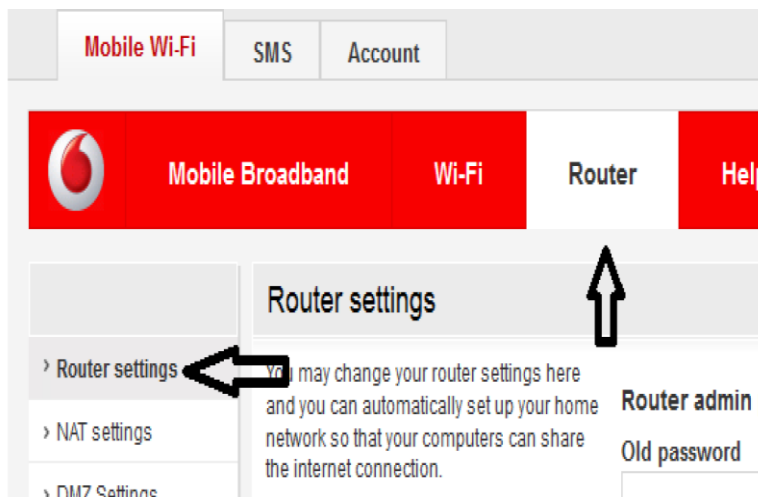

Enter **"new or preferred"** password.
Confirm password and select **'Save'**.

Router settings

You may change your router settings here and you can automatically set up your home network so that your computers can share the internet connection.

You may also change your router password, however should you do so you will need to use the new password to log in to your router to make any changes.

If you choose to switch off your router when idle you will need to switch it on manually the next time you wish to connect to the internet. If you choose longer battery life then the Wi-Fi range of your router may be reduced.

You may change your Dynamic Host Configuration Protocol (DHCP) settings here to automatically assign IP addresses to devices that connect to your Device network.

Router admin password

Old password ←

New password ←

Confirm password ←

Save ↑


IP Address of your router

LAN domain

Modify SSID and Password

Establish a connection to the internet by connecting the pocket Wi-Fi to your laptop/ computer through Wi-Fi connection or cable connection.

Open a web browser and enter the URL on the address bar: **http://VodafoneMobile.wifi** or **http://192.168.0.1**

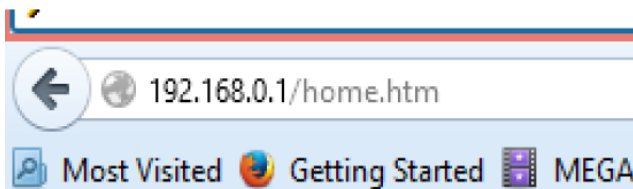


Login using default admin **password** as **'admin'**.

Choose language Password Login

[Redacted]

Select **Wi-Fi** on the Navigation bar and then select **Security**.

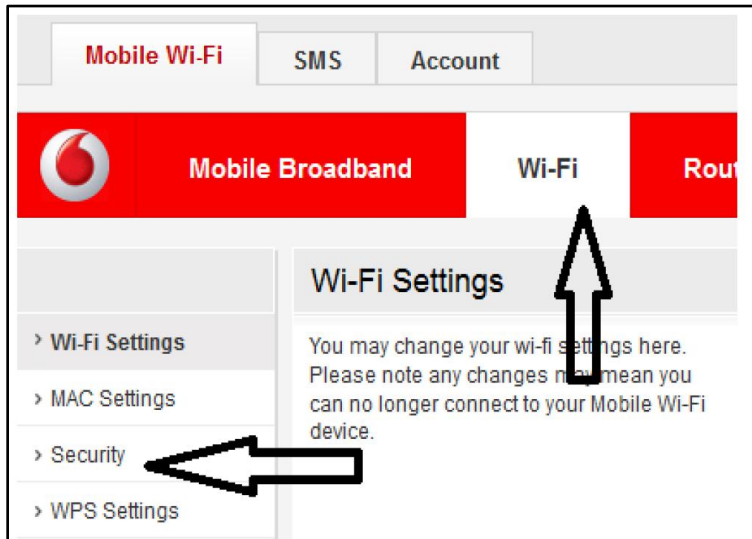


Enter **New or Preferred username** (SSID) and **key** (Password).
Confirm password and select **Save**.




Recharge and to check Data balance

Establish a connection to the internet by connecting the pocket Wi-Fi to your laptop/ computer through Wi-Fi connection or cable connection.


Open a web browser and enter the URL on the address bar:**http://VodafoneMobile.wifi** or **http://192.168.0.1**

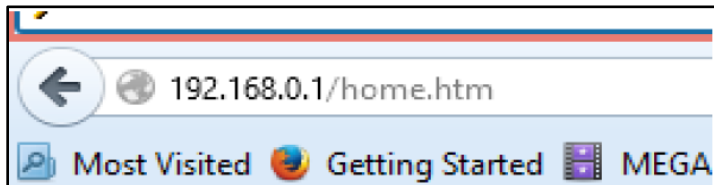


Login using default admin **password** as 'admin'.

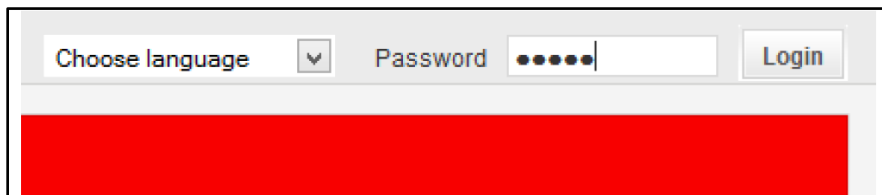

Select "SMS" option.

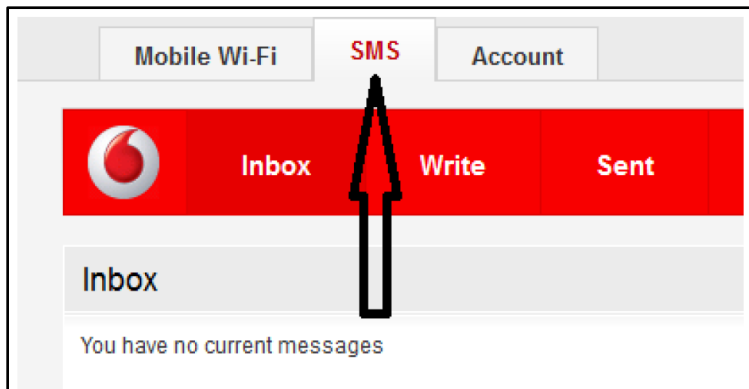


From SMS options select **Write** enter Recharge pin numbers in "Text box" and send it to 132.

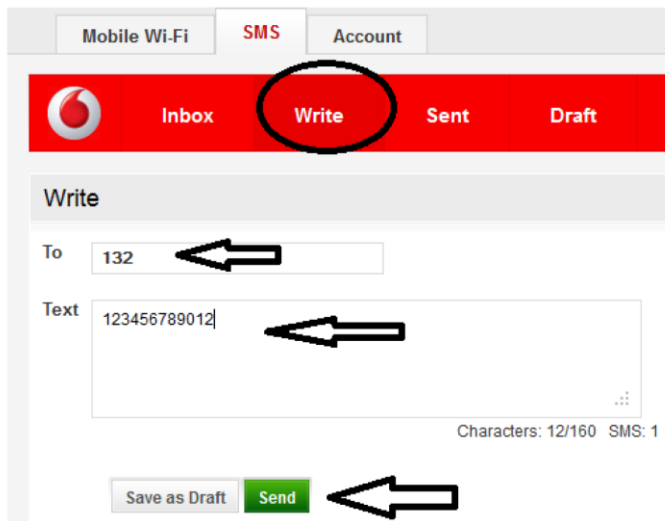

The screenshot shows the 'Write' screen in an SMS application. At the top, there are tabs for 'Mobile Wi-Fi', 'SMS', and 'Account'. Below these is a red navigation bar with icons for 'Inbox', 'Write', 'Sent', and 'Draft'. The 'Write' tab is selected and circled in black. Below the navigation bar, the 'Write' screen has a 'To' field containing '132' with a black arrow pointing to it. The 'Text' field contains the number '123456789012' with a black arrow pointing to it. At the bottom, there are two buttons: 'Save as Draft' and 'Send', with a black arrow pointing to the 'Send' button. The status bar at the bottom right indicates 'Characters: 12/160 SMS: 1'.

Click on Write tab and send blank SMS to 131 to check data balance

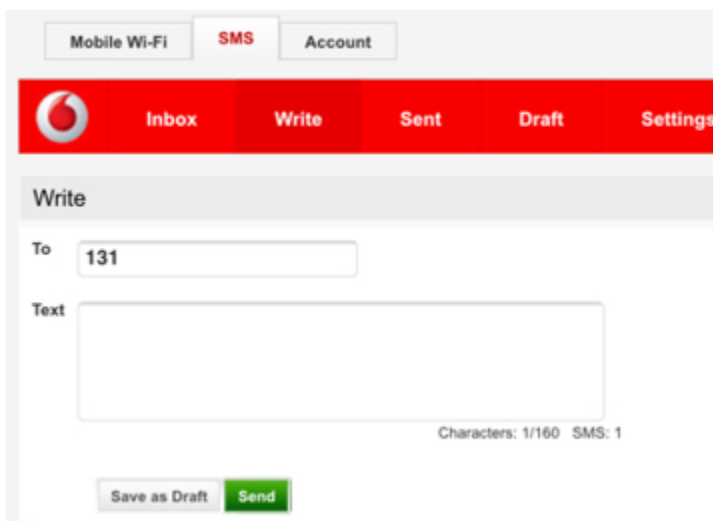


The screenshot shows the 'Write' screen in an SMS application. At the top, there are tabs for 'Mobile Wi-Fi', 'SMS', and 'Account'. Below these is a red navigation bar with icons for 'Inbox', 'Write', 'Sent', 'Draft', and 'Settings'. The 'Write' tab is selected. Below the navigation bar, the 'Write' screen has a 'To' field containing '131'. The 'Text' field is empty. At the bottom, there are two buttons: 'Save as Draft' and 'Send'. The status bar at the bottom right indicates 'Characters: 1/160 SMS: 1'.


Change Network Mode

Establish a connection to the internet by connecting the pocket Wi-Fi to your laptop/ computer through Wi-Fi connection or cable connection.


Open a web browser and enter the URL on the address bar: **http://VodafoneMobile.wifi** or **http://192.168.0.1**

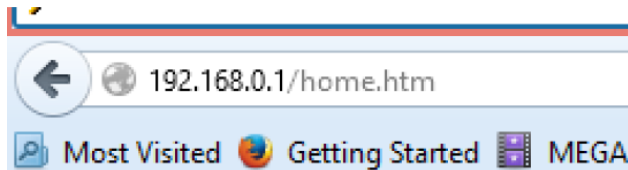


Login using default admin **password** as 'admin'.

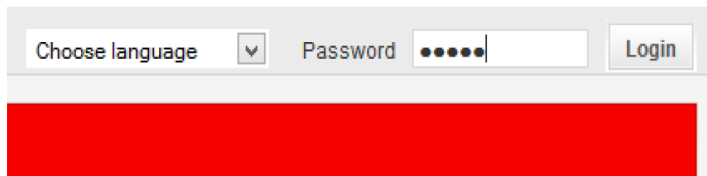

Select "**Mobile Broadband**" tab and then select "**Network**"

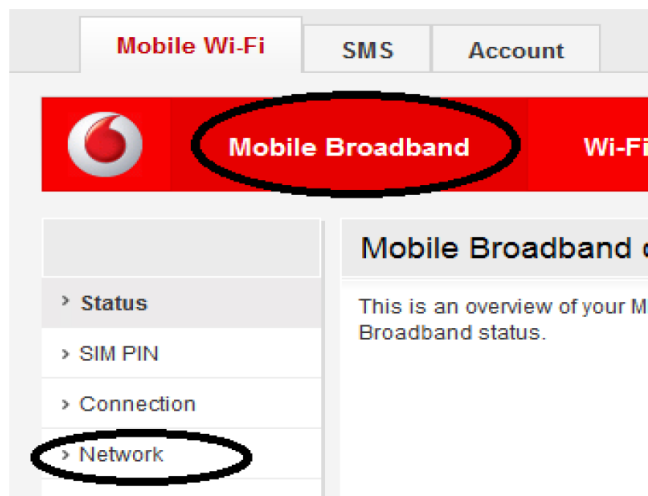

Select your preferred Network mode and click on 'Search'

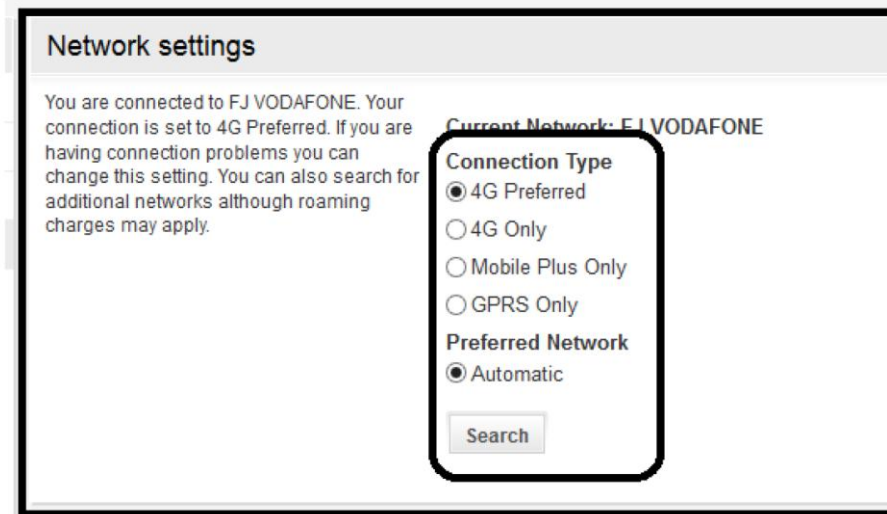


Retrieve Wi-Fi key


First "Reset" your pocket Wi-Fi using reset button on the pocket Wi-Fi device.



Once rest is done then connect your pocket Wi-Fi to your laptop/computer via USB cable. Open a web browser and enter the URL on the address bar **http://VodafoneMobile.wifi** or **http://192.168.0.1**

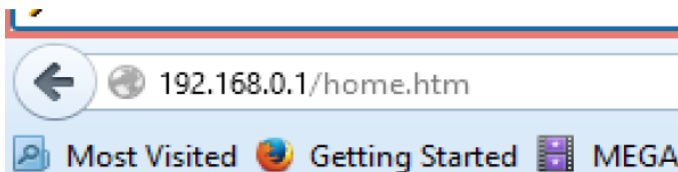

Login using default admin **password** as 'admin'.

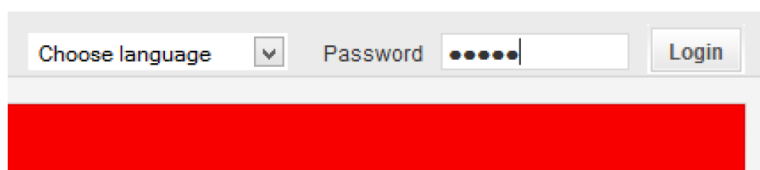


Click on '**Wi-Fi**' tab then select '**Security**' and Wi-Fi key will be displayed.




Check Sim Number

Open a web browser and enter the URL on the address bar <http://VodafoneMobile.wifi> or <http://192.168.0.1>

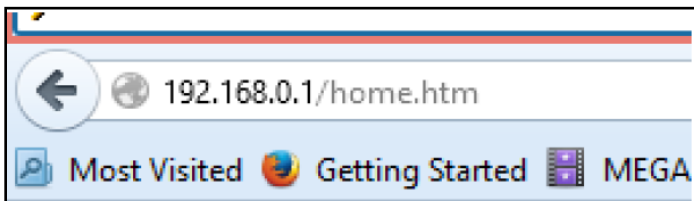


Login using default admin **password** as '**admin**'

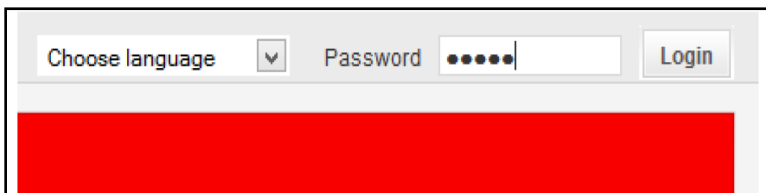


Select Account and it will display sim number.

Check Message Centre Number

Open a web browser and enter the URL on the address bar **http://VodafoneMobile.wifi** or **http://192.168.0.1**

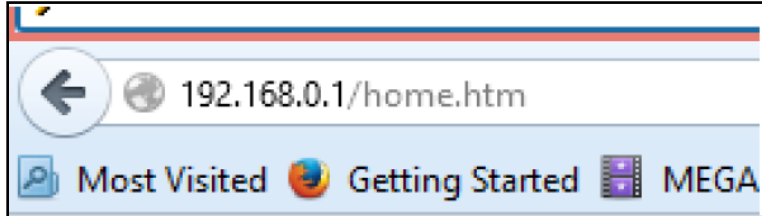

Login using default admin **password** as 'admin'

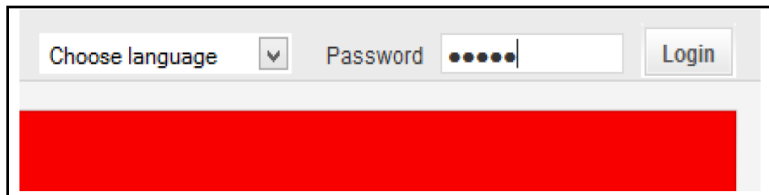

Select **SMS**

Message Centre number **+679901400**

